


## Cisco CCIE Certification 400-351 Exam



- Vendor: Cisco
- Exam Code: 400-351
- Exam Name: CCIE Wireless Written Exam

**Get Complete Version Exam 400-351 Dumps with VCE and PDF Here**



<https://www.passleader.com/400-351.html>

**NEW QUESTION 108**

Which port does cisco JSE use by default to send RADIUS CoA messages to the Cisco WLC?

- A. UDP 3799
- B. UDP 1813
- C. UDP 1700
- D. TCP 1812

**Answer: C**

**NEW QUESTION 109**

Which technology is used by AVC on a Cisco WLC for identification and classification of applications?

- A. modular QoS CLI
- B. NBAR
- C. ACL
- D. IP precedence

**Answer: B**

**NEW QUESTION 110**

Drag and Drop Question

Drag and drop the RRM function on the left to the entity that performs the function on the right.


dynamic channel assignment	F Group Leader
coverage hole detection and correction	
transmit power control	
	WLC

**Answer:**

dynamic channel assignment	F Group Leader
coverage hole detection and correction	dynamic channel assignment
transmit power control	transmit power control
	WLC
	coverage hole detection and correction

**NEW QUESTION 111**

Refer to the exhibit. Which AAA attribute is not used by the Cisco WLC running AireOS 8.0?

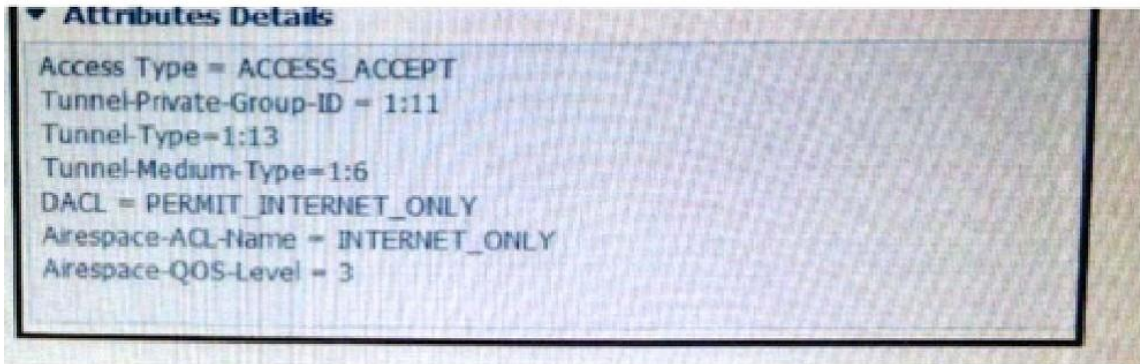

- A. Tunnel-Pnvate-Group-10
- B. Tunnel-Type
- C. Airespace-QOS-Level
- D. DACL

**Answer: D**

**NEW QUESTION 112**

When creating a guest account on Cisco identity Services Engine. Which option in the sponsor portal allows for the guest credentials to be used for RADIUS authentication without requiring the guest user to log into the guest portal?

- A. Set the Guest role to Guest
- B. Set the Guest role to Activated guest
- C. Set the Time Profile to Radius 1Day
- D. Check the box to send email not send email notification id the guest user name is based on the email address

**Answer: B**

**NEW QUESTION 113**

Drag and Drop Question

Drag and drop the per-client downstream rate limiting settings on the left on their correct order of preference on the right.

AAA override/user role	Highest
QoS Profile	Medium
Anchor Controller Parameters	Lowest
WLAN	Least Preference

**Answer:**

AAA override/user role	Anchor Controller Parameters
QoS Profile	AAA override/user role
Anchor Controller Parameters	WLAN
WLAN	QoS Profile

**NEW QUESTION 114**

Which two statements about 802.11 are true? (Choose two.)

- A. MIC is appended for robust management frame.
- B. IGTK is used to protect robust broadcast and multicast management frames.
- C. Association and disassociation frames are protected.
- D. PKC is used to protect robust unicast management frames.
- E. Association responses are not protected.

**Answer: BE**

**NEW QUESTION 115**

Your customer has high availability Client SSO configured using a pair of Cisco 5508 WICs running 8.0 code. The primary unit failed over and the secondary unit is now active. Which two statements are true? (Choose two.)

- A. Both controller RMI can be in different subnets
- B. Only the clients that are in the run state are maintained during failover
- C. Clients that are in transition such as roaming are dissociated
- D. New mobility is supported

**Answer: BC**

**NEW QUESTION 116**


You are installing CA controllers that run Cisco IOS-XE and you are ready to implement QoS. Which QoS target level apply to downstream traffic (toward the client)?

- A. Client SSID
- B. Client SSID radio
- C. Client SSID Radio port
- D. Client radio

**Answer: C**

**NEW QUESTION 117**

Refer to the exhibit. Which statement about this CPU ACL is true?

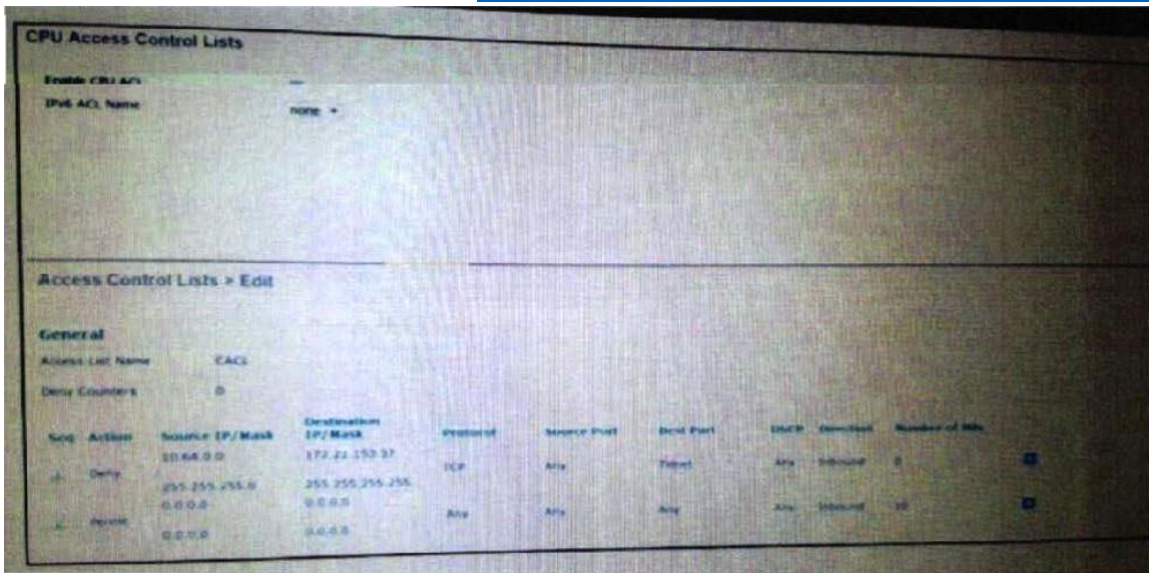

Action	Source	Mask	Protocol	Source Port	Destination	Dest Port
DENY	10.64.0.0	255.255.255.0	TCP	Any (0.0.0.0)	WLC IP	TELNET
PERMIT	0.0.0.0	0.0.0.0	ANY	Any	ANY	ANY

- A. A user on the 10.64.0.0/24 network can use SSH to access the WLC
- B. A User on the 10.64.0.0/24 network can not use HTTPS to accessthe WLC GUI
- C. A user on the 10.64.0.0/24 network can not use telnet to access the WLC 172.21.159.37
- D. Any user on any other subnet can access the WLC

**Answer: C**

**NEW QUESTION 118**

Which three AP modes are supported by Converged Access WLC (3650/3850/5760) in cisco ISO-XE software 3.6E? (Choose three.)

- A. sniffer
- B. local
- C. Fiexconnect
- D. monitor
- E. office extend
- F. Mesh

**Answer: ABD**

**NEW QUESTION 119**

Your customer needs the list of all the guest client that connected to Wi-Fi successfully but have not yet authenticated. The customer decides to create an advanced filter in Cisco Plunder monitor client and user, which two conditions should be included in the filter? (Choose two.)



- A. PEM state =WebauthReqD
- B. On Network= Yes
- C. Status =Associated
- D. Type =Lightweight client

**Answer: CD**

**NEW QUESTION 120**

Refer to the exhibit. Your customer is testing native supplicant provisioning using the ISE (at 192.168.1.2) and a Cisco WIC. The Cisco WIC has an ACcl onfigured on it called onboarding during the testing of many different client devices (android apple windows) it appears that these devices are never redirected to the on boarding portal through they a access the internet, which statement explain this behavior?

Seq	Action	Source IP/Mask	Destination IP/Mask	Protocol	Source Port	Dest Port	DSCP	Direction	Number of Hits
1	Permit	0.0.0.0 /	0.0.0.0 /	UDP	Any	DHCP Server	Any	Any	0
2	Permit	0.0.0.0 /	0.0.0.0 /	UDP	DHCP Server	Any	Any	Any	0
3	Permit	0.0.0.0 /	0.0.0.0 /	UDP	Any	DNS	Any	Any	0
4	Permit	0.0.0.0 /	0.0.0.0 /	UDP	Any	DNS	Any	Any	0
5	Permit	0.0.0.0 /	192.168.1.2	Any	Any	Any	Any	Any	0
6	Permit	192.168.1.2	255.255.255.255	Any	Any	Any	Any	Any	0
7	Permit	255.255.255.255	0.0.0.0	Any	Any	Any	Any	Any	0
8	Permit	0.0.0.0 /	0.0.0.0 /	Any	Any	Any	Any	Any	0
9	Permit	0.0.0.0 /	0.0.0.0 /	Any	Any	Any	Any	Any	0

- A. The ACL has a permit any at the end of the list redirection does not take place unless the client hits a website that gets denied
- B. The source and destination port in the ACL are not set up correctly
- C. The ACL has a permit any at the end of the list redirection does not take place unless the client hits a websites that guest permitted
- D. there is nothing wrong the acl the problem must exist either on the client side or on the configured ISE authorization profile

**Answer: C**

**NEW QUESTION 121**

Your customer wants to configure LSCs and asks for specific information about which number to configure in the text box right next to the "Number of Attempts". Which statement is true?

- A. The default number of attempts is 100.
- B. A value of 2 means that if an AP fails to join the Cisco WLC using an LSC, the AP attempts to Join the Cisco WLC using the default certificate.
- C. A value of 255 means that if an AP fails to join the Cisco WLC using an LSC,the AP does not attempt to join the Cisco WLC using the default.
- D. A value of 3 means that if a user fails to authenticate,the user is disconnected after three retries.

**Answer: B**

**NEW QUESTION 122**

Legacy 802.11b wireless scanners are begin implemented in your autonomous AP deployment.

Existing modern clients work fine on the same SSIDs, APs, and channel the legacy scanner are having difficulty maintaining reliable wireless connectivity. Which AP configured could potential correct this issue?

- A. Enable short preamble Dot11Radio0
- B. Disable short preamble Dot11Radio1
- C. Disable short preamble Dot11Radio0
- D. Confirm that 802.11n support is disable
- E. Configure global preamble negotiation
- F. Enable short preamble on Dot11Radio1

**Answer: C**

**NEW QUESTION 123**

You are deploying a high-density wireless setup in a conference center using Cisco Aironet 3700iAPs as you have no Cisco air not 3700e APs available. The power levels for all the APs should be set between 4 and 5. Which configuration option is needed to achieve this goal.?

- A. Select the TPC values between 4 dBm and 8 dBm
- B. Manually configure the power levels of the 802.11b and 802.11a radios of all APs either 4 or 5
- C. Select the TPC values between 4 dBm and 5 dBm
- D. Select the TPC values between 11 dBm and 8 dBm

**Answer: B**

**NEW QUESTION 124**

While configuring Wireless Domain Services, which port is used for traffic between infrastructure APs and the WDS AP?

- A. Generic Routing Encapsulation GRE which IP protocol is 47
- B. UDP destination and source protocol port 1812 (0x0714)
- C. UDP destination and source protocol port 2887 (0x0B47) or Ethernet Type 34605 (0x872D)
- D. UDP destination and Source Protocol port 1645 (0x066D)

**Answer: C**

**NEW QUESTION 125**

Assuming that the antenna system characteristics (for example, gain VSWR, polarization and beam width) are similar for a 5-GHz and 2.4-GHz radio. While conducting a dual band site survey, how to configure the 5-GHz radio, relative to the 2.4-GHz radio, in order to achieve similar cell size?

- A. The 5-GHz radio power level should be higher than the 2.4-GHz radio
- B. The 5-GHz radio should use BPSK modulation and the 2.4 GHz radio should use CCK modulation
- C. The 5-GHz radio power level should be lower than the 2.4-GHz radio
- D. The 5-GHz radio should use CCK modulation and the 2.4-GHz radio should use BPSK modulation

**Answer: A**

**NEW QUESTION 126**

For the following cipher suites, which were defined in the IEEE 802.11i-2004 standard and then again in the 802.11-2007 standard? (Select all that apply.)

- A. TKIP
- B. WEP-40
- C. TCP-IP
- D. WEP-104
- E. AES-CCMP

**Answer: ABDE**

**NEW QUESTION 127**

Which two actions will happen when a wireless client deploys a Layer 2 roam between two WLCs with management IP addresses on different IP subnets but dynamic interfaces in the same VLAN? (Choose two.)

- A. The new WLC exchanges mobility messages with the original WLC and the client database entry is moved to the new WLC.
- B. The original WLC marks the client with an "Anchor" entry in its own client database.
- C. The client database entry is maintained on both the original and new WLCs.
- D. The client database entry is removed from the original WLC once it has been entered into the new WLC.

**Answer: AD**

**NEW QUESTION 128**

How to monitor CPU utilization on a wireless LAN Controller?


- A. Define the network management system and community in the WLC and a matching v1 or v2 community-string in the network management system to enable the WLC CPU OID to be polled.
- B. Define the network management system as a trap receiver and enable the default RFC 1213 traps, which include Sys CPU Utilization.
- C. Define the network management system in the WLC with a matching read-write SNMP community to enable the WLC CPU OID to be polled with an SNMP set by the network management system.
- D. Define an external syslog receiver in the WLC that will receive a syslog message when the percentage of CPU processing ability reaches a preconfigured percentage.

**Answer: A**

**NEW QUESTION 129**

.....

**Get Complete Version Exam 400-351 Dumps with VCE and PDF Here**



<https://www.passleader.com/400-351.html>