

[28-June-2017 New 400-101 Dumps with VCE and PDF from PassLeader (Update Questions)]

New 400-101 exam questions from PassLeader 400-101 dumps! Welcome to download the newest PassLeader 400-101 VCE and PDF dumps: <http://www.passleader.com/400-101.html> (100 Q&As [2019 NEW VERSION])

P.S. Free 400-101 dumps are available on Google Drive shared by PassLeader:

https://drive.google.com/open?id=0B-ob6L_QjGLpfnRCUEFYcEhWZUw3OGNQY2FUSkptUXBrZDVzeE8zdkJQUERtOUFINDBFQW8

NEW QUESTION 599

Refer to the Exhibit. Which is the effect of the given configuration?


Router (config) #no logging on

- A. The router stops SNMP logging.
- B. The router logs messages only to the console.
- C. The router stops logging messages to the syslog server only.
- D. The router log message only to the buffer.

Answer: C

NEW QUESTION 600

Refer to the Exhibit. Which technology can allow Site A and Site B to run OSPF between sites?



- A. Point-to point circuit.
- B. BGP
- C. GRE Tunnel
- D. Cisco MPLS TE

Answer: C

NEW QUESTION 601

Which two statements about native VLANs are true? (Choose two.)

- A. They require VTPv3.
- B. They are used to forward untagged traffic only.
- C. They are used to forward tagged traffic only.
- D. They are configured in VLAN database mode.
- E. They are configured under the trunk interface.
- F. They are used to forward both tagged and untagged traffic.

Answer: BE

NEW QUESTION 602

When you deploy DMVPN, what is the purpose of the command key cisco test address 0.0.0.0.0.0.0.0.?

- A. It is configured on the hub and spoke routers to establish peering.
- B. It is configured on the hub to set the pre-shared key for the spoke routers.
- C. It is configured on the internet PE routers to traverse the ISP core.
- D. It is configured on the spokes to router.

Answer: B

NEW QUESTION 603

Which technology allows several switches to operate together as one device?

- A. HSRP

- B. VRRP
- C. LACP
- D. Stack Wise

Answer: D

NEW QUESTION 604

Which two statements about OSPFv3 are true? (Choose two.)

- A. It supports the use of a cluster ID for loop prevention.
- B. It supports unicast address families for IPv6 only.
- C. It supports unicast address families for IPv4 and IPv6.
- D. It supports only one address family per instance.
- E. It supports multicast address families for IPv4.
- F. It supports multicast address families for IPv6.

Answer: CD

NEW QUESTION 605

Which MLD message type does a host send to join multicast groups?

- A. Join/prune
- B. Hello
- C. Query
- D. Done
- E. Report
- F. Assert

Answer: E

NEW QUESTION 606

Refer to the exhibit. If R4 is configured as table, which IP???

```
R4
R4(config)#ip route 0.0.0.0 0.0.0.0 Null0
R4(config)#router eigrp 123
R4(config-eigrp)#network 4.0.0.0
R4(config-eigrp)#network 10.0.0.0
R4(config-eigrp)#redistribute static
R4(config-eigrp)#eigrp stub
R4(config-eigrp)#end

R4#show ip eigrp neighbors
EIGRP-IPv4 Neighbors for AS(123)
H Address          Interface          Hold Uptime   SRTT  RT0  Q  Seq
  1  10.1.4.1          Fa1/0              12 00:04:06   53   477  0  30
  0  10.2.4.2          Fa1/1              13 00:04:06   76   684  0  24
```

- A. 0.0.0.0/0, 4.4.4.4/32 and 10.2.4.0/24
- B. 0.0.0.0/0 and 4.4.4.4/32 only
- C. 4.4.4.4/32 and 10.1.4.0/24 only
- D. 4.4.4.4/32 and 10.2.4.0/24 only
- E. 4.4.4.4/32, 10.2.4.0/24 and 2.2.2.2/32

Answer: D

NEW QUESTION 607

Which TCP features allows a client to request a specific packet that was lost?

- A. flow control
- B. sliding window
- C. fast recovery
- D. selective acknowledgment

Answer: D

NEW QUESTION 608

Refer to the Exhibit. Which configuration can you implement on PE-1 to allow CE-1 to receive delegated IPv6 prefixes??

Answer: E

NEW QUESTION 609

What are two major requirements for configuring an extended VLAN with VTPv2? (Choose two.)

- A. VLAN pruning must be enabled
- B. The device must be operating in VTP transparent mode
- C. The configuration must be made in global configuration mode
- D. The VLAN must be configured in VLAN database mode
- E. The reduced MAC address feature must be disabled

Answer: BC

NEW QUESTION 610

Which two statements about MLD snooping are true?

- A. MLD protocol messages can be sent in both IGMPv4 and ICMPv4 formats.
- B. It supports private VLANs.
- C. It limits the Layer 2 multicast traffic that is generate by routing protocols.
- D. PFC modes support MLD version 2 only.
- E. The MLD snooping querier requires the VLAN interface to be configured with an IPv6 address.

Answer: BE

NEW QUESTION 611

Which IPv6 tunneling mechanism requires a service provider to nuke one of its own native IPv6 blocks to guarantee that its IPv6 hosts will be reachable?

- A. 6rd tunneling
- B. Automatic 6to4 tunneling
- C. Manual IPv6 ip tunneling
- D. NAT-PT tunneling
- E. Automatic 4to6 tunneling
- F. ISATAP tunneling

Answer: F

NEW QUESTION 612

Refer to the exhibit. After you applied this configuration to R1 and R2, they failed to form an ISIS adjacency. Which reason for the problem is most likely true?

```
www.passleader.com
R1
interface Serial1/0
  mtu 1514
  bandwidth 1000
  ip address 192.168.12.97 255.255.255.224
  ip router isis
  serial restart-delay 0
router isis
  net 01.0001.0000.0000.0001.00

R2
interface Serial1/0
  mtu 1516
  bandwidth 2000
  ip address 192.168.12.98 255.255.255.224
  ip router isis
  serial restart-delay 0
router isis
  net 01.0001.0000.0000.0002.00
```

- A. The network statements are mismatched
- B. The IP subnets are mismatched
- C. The bandwidth is mismatched
- D. The MTUs are mismatched

Answer: D

NEW QUESTION 613

Which two statements about Cisco Express Forwarding are true? (Choose two.)

- A. Adjacency tables and Cisco Express Forwarding tables require packet switching.
- B. Cisco Express Forwarding tables contain forwarding information and adjacency tables contain reachability information.
- C. Adjacency tables and Cisco Express forwarding tables can be separately.
- D. Changing MAC header rewrite strings requires cache validation.
- E. Cisco Express Forwarding tables contain reachability information and adjacency tables contain forwarding information.

Answer: CE

NEW QUESTION 614

On which three options can Cisco PfR base its traffic routing? (Choose three.)

- A. Time of day
- B. Network performance
- C. Router IOS version
- D. User-defined link capacity thresholds
- E. An access list with permit or deny statements
- F. Load-balancing requirements

Answer: BDF

NEW QUESTION 615

Which three statements about BGP soft reconfiguration are true? (Choose three)

- A. Outbound soft reconfiguration requires additional configuration on the BGP neighbor
- B. Inbound soft reconfiguration requires additional memory
- C. Outbound soft reconfiguration requires additional memory
- D. Inbound soft reconfiguration stores an additional copy of the received from a neighbor before routing policies take effect
- E. Inbound soft reconfiguration requires additional memory
- F. Outbound soft reconfiguration stores an additional copy of the routes advertised to a neighbor before routing policies take effect

Answer: BEF

NEW QUESTION 616


What mechanism should you choose to prevent unicast flooding?

- A. Make sure that all end systems are connected to the network with a single physical connection.
- B. Use control plane policing (CPP) to limit unicast flooding.
- C. Configure the ARP cache timers to be longer than the switch forwarding cache (CAM) timers.
- D. Configure the switch forwarding cache (CAM) timers to be longer than the ARP cache timers.

Answer: D

NEW QUESTION 617

Refer to the exhibit. Which two statements about the device configuration are true? (Choose two.)

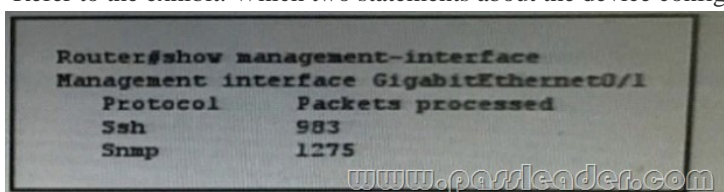

```
Router#show management-interface
Management interface GigabitEthernet0/1
  Protocol      Packets processed
  Ssh           983
  Snap         1275
```

www.passleader.com

- A. The device has control-plane protection enabled.

- B. The device implicitly allows Tel net connections.
- C. The GigabitEthernet0/1 interface of the device allows incoming SSH and SNMP connections.
- D. The device has management-plane protection enabled.
- E. The device allows SSH connections to its loopback interface.

Answer: CD

NEW QUESTION 618

What are the two requirements for BGP to install a classful network into the BGP routing table? (Choose two.)

- A. Synchronization is disabled.
- B. The AS contains the entire classful network.
- C. Auto-summary is enabled.
- D. A classful network is statement with a classful mask is in the routing table.
- E. A classful network statement with a lower administrative distance in the routing table.
- F. Synchronization is enabled.

Answer: CD

NEW QUESTION 619

Which authentication types does OSPF support?

- A. Null (or no authentication), clear text and MD5.
- B. Clear text only.
- C. MD5 only.
- D. MD5 and clear text.
- E. Null (or no authentication) and clear text.

Answer: A

NEW QUESTION 620

??

New 400-101 exam questions from PassLeader 400-101 dumps! Welcome to download the newest PassLeader 400-101 VCE and PDF dumps: <http://www.passleader.com/400-101.html> (100 Q&As [2019 NEW VERSION])

P.S. Free 400-101 dumps are available on Google Drive shared by PassLeader:

https://drive.google.com/open?id=0B-ob6L_QjGLpfnRCUEFYcEhWZUw3OGNQY2FUSkptUXBrZDVzeE8zdkJQUERtOUFINDBFQW8